

FUZYPRO 8010 1/8 DIN Panel Indicator



The FUZYPRO 8010 is a 1/8 DIN microprocessor based digital indicator. Available with red or green displays. One latchable relay is fitted as standard, plug-in modules allow two more alarm relays, PV retransmission or transmitter PSU.

- Four-digit LED display
- Up to 3 alarms
- Transmitter PSU option
- Min/max value hold
- Engineering units
- PC configuration
- PV retransmit option
- RS485 comms option



Technical Data

Features

Output Configuration	Up to 3 total., max 3 for Alarms, max 1 for retransmit of PV, max 1 transmitter power supply
Alarm 1,2 & 3 Types	Process high, process low, direct acting, process high, process low reverse and logical OR
Viewable Values	Process variable, maximum value, minimum value and elapsed time since reset
Legends	°C/°F LED. Labels for 27 other common units, mounted behind clear window
Human Interface	3 button operation, 4 digit 13mm high red or green display, plus set-up, alarm, max & min indicators
PC Configuration	Off-line configuration from serial port to dedicated config socket (comms option not required)

Input



Thermocouple	J, K, R, S, T, B, L, & N.
RTD	3 Wire PT100, 50Ω per lead maximum (balanced)
DC Linear	0-20/4-20mA, 0-50/10-50mV, 0-5/1-5/0-10/2-10V. Scaleable -1999 to 9999, dec point available
Impedance	>100MΩ for Thermocouple and mV ranges, 47KΩ for V ranges and 4.7Ω for mA ranges
Accuracy	+/- 0.25% of input span +/- 1 LSD (T/C CJC better than 0.7°C)
Sampling	4 per second, 14 bit resolution approximately
Sensor Break Detection	<2 secs (except zero based DC ranges), *high alarms activate (*low for RTD, mA or V).

Outputs & Options

Alarm 1 Relay	Contacts SPDT 2Amp resistive at 240V AC, >500,000 operations, latching or non-latching. Fitted as standard
Alarm 2 & 3 Relays	Contacts SPDT 2Amp resistive at 240V AC, >500,000 operations (optional)
Retransmit Output	0-20/4-20mA into 500Ω max, 0-10/0-5V into 500Ω min. Accuracy typically +/- 0.25%
Transmitter Power Supply	20-28V DC (24V nominal), max load 910Ω (22mA at 20V)
Remote Reset	External reset of latching alarm 1 relay. Volt free or TTL input (Reset = open to close or "0" to "1" transition. 0 = -0.6 to 0.8V, 1 = 2 to 24V)
Communications	2 wire RS485, 1200 to 9600 baud. Modbus or West ASCII (selectable)

Operating & Environmental

Temperature & RH	0 to 55°C (-20 to 80°C storage), 20% to 95%RH non-condensing
Power Supply	100 to 240V 50/60Hz (optional 20 to 55V AC/22 to 65V DC), approx 4 Watts
Front Panel Protection	IEC IP66 (Behind panel protection is IP20)
Approvals and Certification	CE, UL & ULc

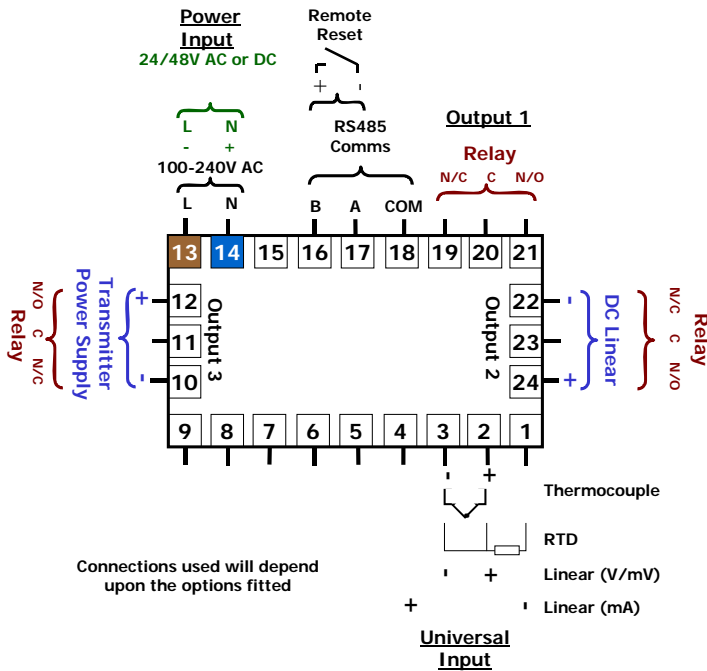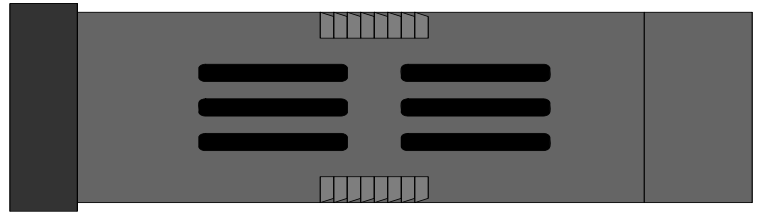

N8010 - **x** - **1** - **x** - **x** - **xx** - **x**

Input type

3 Wire RTD or DC mV	1
Thermocouple	2
DC mA	3
DC Voltage	4

Output 1

Relay Alarm 1	1
---------------	---

Output 2

Not fitted	0
Relay Alarm 2	1
DC 0-10V Re-Transmit PV	3
DC 0-20mA Re-Transmit PV	4
DC 0-5V Re-Transmit PV	5
DC 4-20mA Re-Transmit PV	7

Colour

0	Red LED Display
1	Green LED Display

Options and Power Supply

00	No Options/100-240V AC line supply
02	No Options/24-48V AC or DC line supply
10	RS485 Comms/100-240V AC line supply
12	RS485 Comms/24-48V AC or DC line supply
30	Remote Lock/100-240V AC line supply
32	Remote Lock/24-48V AC or DC line supply

Output 3

0	Not fitted
1	Relay Alarm 2 or 3
8	Transmitter Power Supply

In accordance with our policy of continuous improvement, we reserve the right to change specifications from those shown in this document.