


THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF ENERGY CORPORATION OF CANADA AND IS NOT TO BE REPRODUCED, COPIED, TRANSMITTED, OR OTHERWISE DISCLOSED WITHOUT THE WRITTEN PERMISSION OF ENERGY CORPORATION OF CANADA.

All dimensions are typical

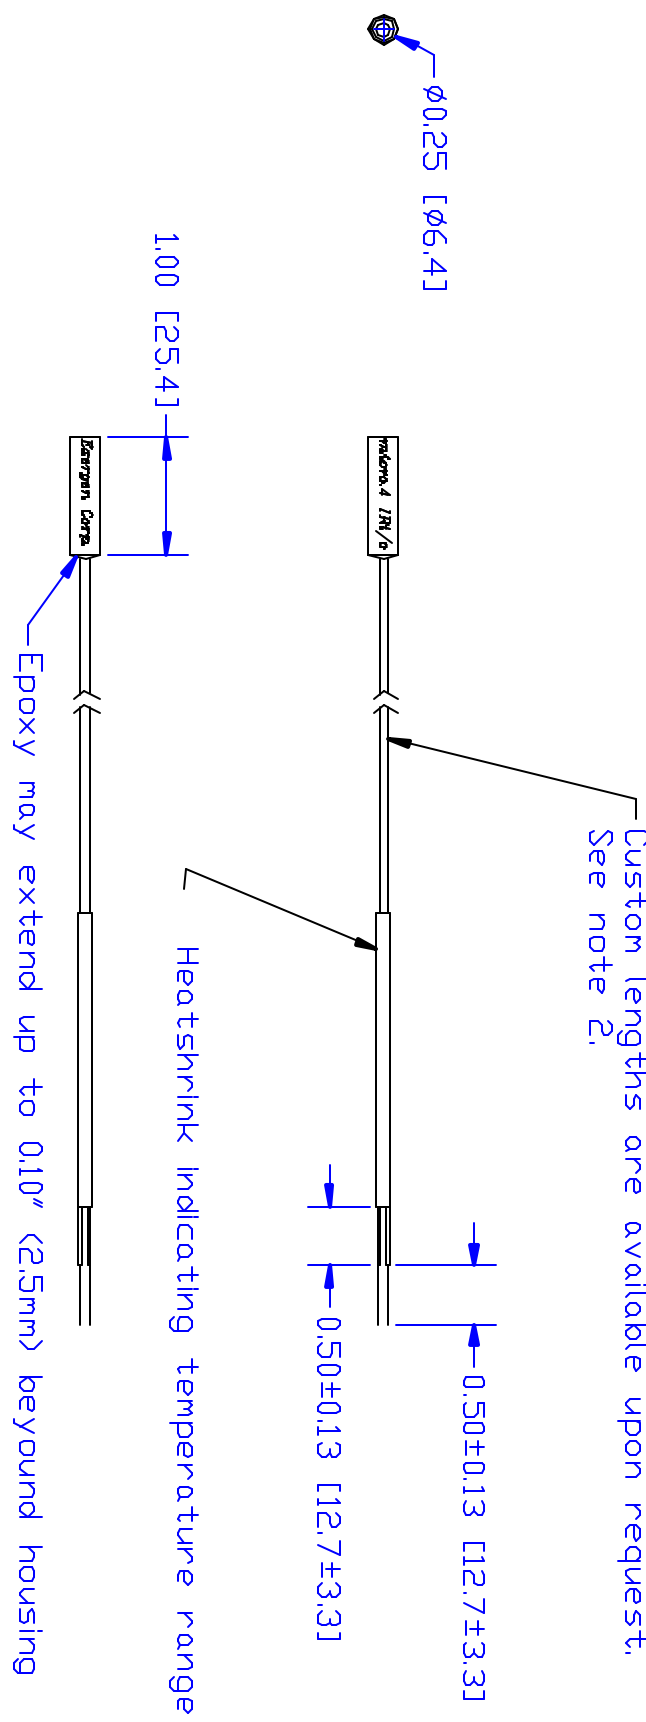

Standard cable length is 3 feet (0.91 meters)
 Custom lengths are available upon request.
 See note 2.

Heatshrink indicating temperature range

Epoxy may extend up to 0.10" (2.5mm) beyond housing

- Notes:
1. Wire Typically K type thermocouple wire, Teflon Neoflon PFA insulation (both inner and outer) 24 AWG, 7 x 32 AWG strands. Nominally sized 0.063 x 0.102 (1.6 x 2.6 mm)

REVISIONS					
REV	ZONE	DESCRIPTION	ECO	DATE	APPROVED
1		Release	2/18/4	3/9/03	

USER'S OFFICE AND/OR DIVISION NAME IN BLOCKS TOLERANCES UNLESS SPECIFIED DECIMALS ANGLES FINISH: NA		DRG. B. Duron CHK: APPD: APPR:	SIZE: B DRAWING NO.: 900098 SCALE: 1:1	TITLE: Outline micro.4 REV.: 1 SHEET: 1 OF 1
---	--	---	--	---