

## ECONO Drum and Pail Heater


### Product Highlights

- ✓ Economical choice for exceptional durability and flexibility for a wide range of metal drum heating applications
- ✓ Easy adjustable thermostat control displays both °F and °C
- ✓ Wide 3.6" (91mm) silicone rubber band
- ✓ Patented grounded heating element meets NEC 427.23
- ✓ Moisture, chemical, and radiation resistant
- ✓ Heating element is laminated between two layers of 20mil fiberglass reinforced silicone rubber



### Specifications:

- Adjustable Thermostat: Up to 425°F (218°C)<sup>†</sup>
- Voltage Options: 120VAC or 240VAC
- Exposure Temperature: -60°F to 450°F (-51°C to 232°C)
- Dielectric Strength: Over 2000 volts
- Silicone Rubber Density: 46.0 oz/yd<sup>2</sup> (1560 g/m<sup>2</sup>)
- Spring closure can be expanded 3" (76mm)
- Power cord 6-foot (1.8m) long  
120V includes standard 3-prong plug (NEMA 5-15)  
240V has crimped ferrule terminated leads
- Ingress Protection Rating: IP54

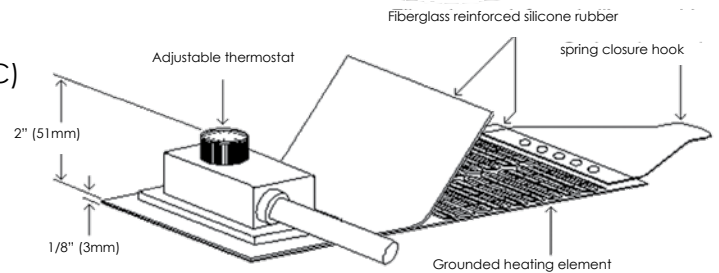

<sup>†</sup> If precise temperature control is required for your application, please contact BriskHeat or your local distributor for application assistance and product solutions.

### Ordering Information:

Size Gallon (Liter)	Diameter in (mm)	Total Wattage	Length in (mm)	Width in (mm)	Part Number	
					120VAC	240VAC
5 (19)	11.1 (282)	300	35.0 (889)	3.6 (92)	ECONO5-1	ECONO5-2
16 (61)	14.0 (355)	500	44.0 (1118)	3.6 (92)	ECONO15-1	ECONO15-2
30 (114)	18.6 (473)	750	58.5 (1486)	3.6 (92)	ECONO30-1	ECONO30-2
55 (208)	22.3 (566)	1100	70.0 (1778)	3.6 (92)	ECONO55-1	ECONO55-2

### Accessories:

Part Number	Description
10180	Replacement spring for BriskHeat® Silicone Rubber Drum Heaters



10180: Replacement Spring

-- **HCS** --  
**Heaters, Controls And Sensors LTD**  
**HEATING AND CONTROL SYSTEMS**