

# 7 DAY TIMER

## APT-6S WEEKLY PROGRAMMABLE TIMER



### CHARACTERISTIC :

- Weekly programmable timer
- Also can be used as 24-hour timer
- 8 different timing settings per day
- 15 different weekly combinations (See chart below)
- Built-in Lithium battery prevent power outage up to one year
- Crystal oscillator for extreme accuracy
- Backlit LCD for easy viewing\*
- UL, C-UL recognized and CE certified

Note: "\*" indicates applicable to APT-6SB only

### SPECIFICATION :

|                                   |  |
|-----------------------------------|--|
| Operating voltage                 | AC/DC(V): 12~48<br>AC/DC(V): 100~240                     |
| Allowable operating voltage range | 85~110% of rated operating voltage                       |
| Rated frequency                   | 50 / 60 Hz   |
| Contact rating                    | 250VAC 7A (resistive load)                               |
| Indicator operating               | ON - Green OFF - Red                                     |
| Power consumption                 | Approx. 3.3VA  |
| Life                              | Mechanical: 5,000,000 times<br>Electrical: 100,000 times |
| Ambient temperature               | -10 ~ +50°C  |
| Ambient humidity                  | MAX 65%RH  |
| Weight                            | Approx. 150g   |

### 15 weekly combinations chart :


|   | SUN | MON | TUE | WED | THU | FRI | SAT |
|---|-----|-----|-----|-----|-----|-----|-----|
| 1 |     | ⊙   |     |     |     |     |     |
| 2 |     |     | ⊙   |     |     |     |     |
| 3 |     |     |     | ⊙   |     |     |     |
| 4 |     |     |     |     | ⊙   |     |     |
| 5 |     |     |     |     |     | ⊙   |     |
| 6 |     |     |     |     |     |     | ⊙   |
| 7 | ⊙   |     |     |     |     |     |     |
| 8 |     | ⊙   | ⊙   | ⊙   | ⊙   | ⊙   |     |

|    | SUN | MON | TUE | WED | THU | FRI | SAT |
|----|-----|-----|-----|-----|-----|-----|-----|
| 9  |     | ⊙   | ⊙   | ⊙   | ⊙   | ⊙   | ⊙   |
| 10 | ⊙   |     |     |     |     |     | ⊙   |
| 11 | ⊙   | ⊙   | ⊙   | ⊙   | ⊙   | ⊙   | ⊙   |
| 12 |     | ⊙   | ⊙   | ⊙   |     |     |     |
| 13 |     |     |     |     | ⊙   | ⊙   | ⊙   |
| 14 |     | ⊙   |     | ⊙   |     | ⊙   |     |
| 15 |     |     | ⊙   |     | ⊙   |     | ⊙   |


## CONNECTION :

When a time switch and load power supply are separate

N type(Surface Mounting)

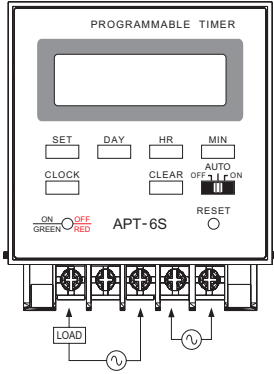


Y type(Flush Mounting)




When a time switch and load power supply are the same

N type(Surface Mounting)

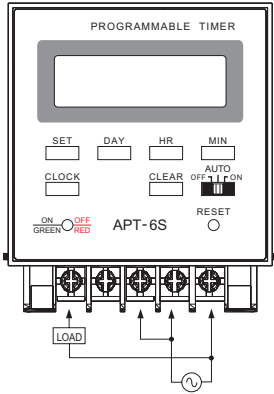


Y type(Flush Mounting)

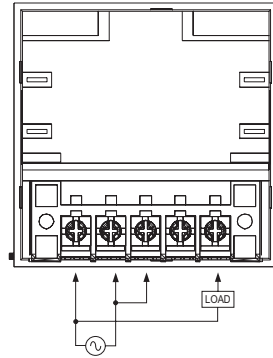


## DIMENSIONS : (mm)

N type(Surface Mounting):

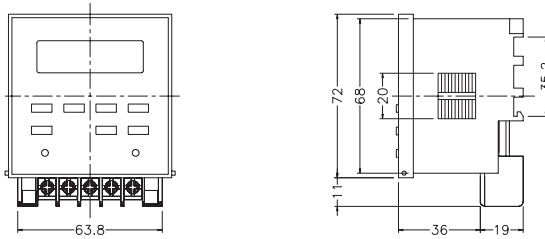

Y type(Flush Mounting): Using Y70 Adapter

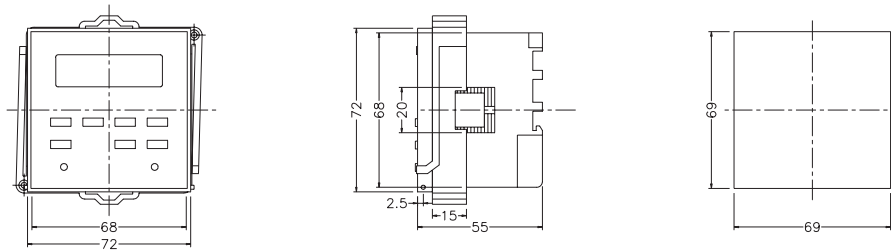

Stocking Distributor :

**Heaters Controls and sensors LtdNICS**

60 Meg Dr Unit 13 London Ontario Canada N6E 3T6  
 TEL: 519 686-2715 Ph 800 279 9912 FAX: 519 686-8159